HLZ-700

Bronze Auto Air Vent - PN10

Product Features

- Removes inevitable potentially dangerous air trapped in system
- Simplifies the venting process
- Saves time and costs

Pressure/Temperature Ratings


TEMPERATURE (°C)	-10 to 50	70
PRESSURE (BAR)	10	7

Intermediate pressure ratings shall be determined by interpolation.

Materials

NO.	PART	MATERIAL
1	Сар	Bronze CC491K
2	Stem	H62
3	Gasket	NBR
4	Spring	Stainless Steel 304
5	O Ring	NBR
6	Core	Bronze CC491K
7	Gasket	NBR
8	Air Cap	Bronze CW614N
9	O Ring	NBR
10	Body	Bronze CC491K
11	Floater	Polypropylene
12	O Ring	NBR
13	Connector	CW614N
14	Spring	Stainless Steel 304
15	Screen	Stainless Steel 304
16	O Ring	NBR
17	Disc	Bronze CW614N





Dimensions & Weights


SIZE (inch)	L (mm)	H(m m)
1/2	49	75
3/4	49	75
1	49	75

PRESSURE RATING: PN10

TEMPERATURE OPERATING RANGE: -10° to 70°C END CONNECTION: Taper threaded (ISO 7-1)

HLS-700

Brass Auto Air Vent - PN10

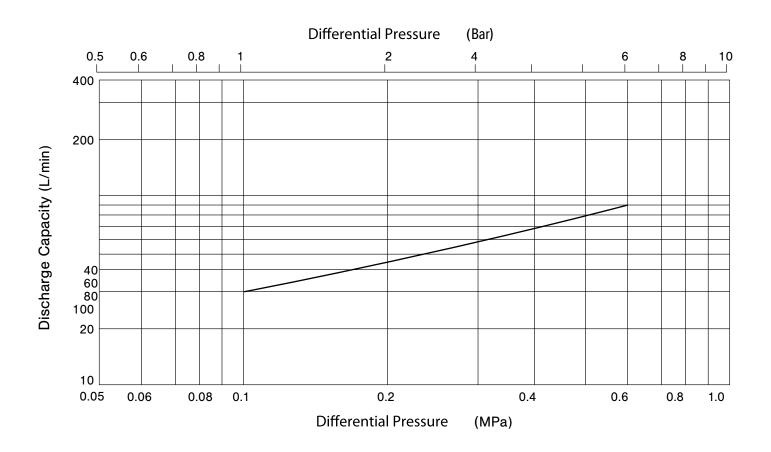

- 1. Differential pressure is the difference between the inlet and outlet pressure of the air vent.
- 2. Capacities are equivalent capacities of air at 20 $^{\circ}\text{C}$ under atmospheric pressure.